


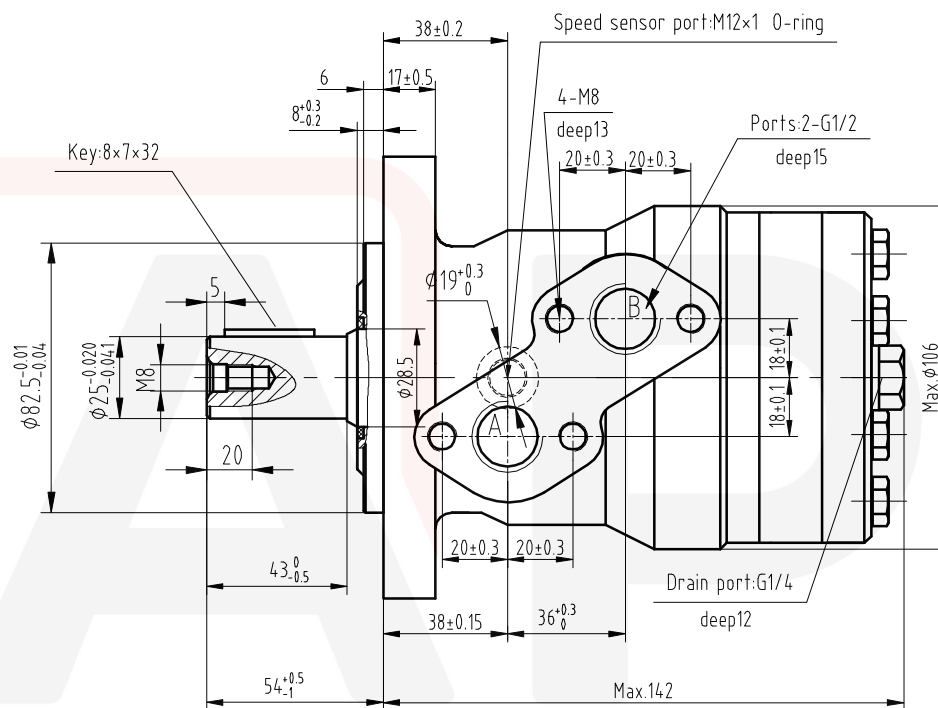
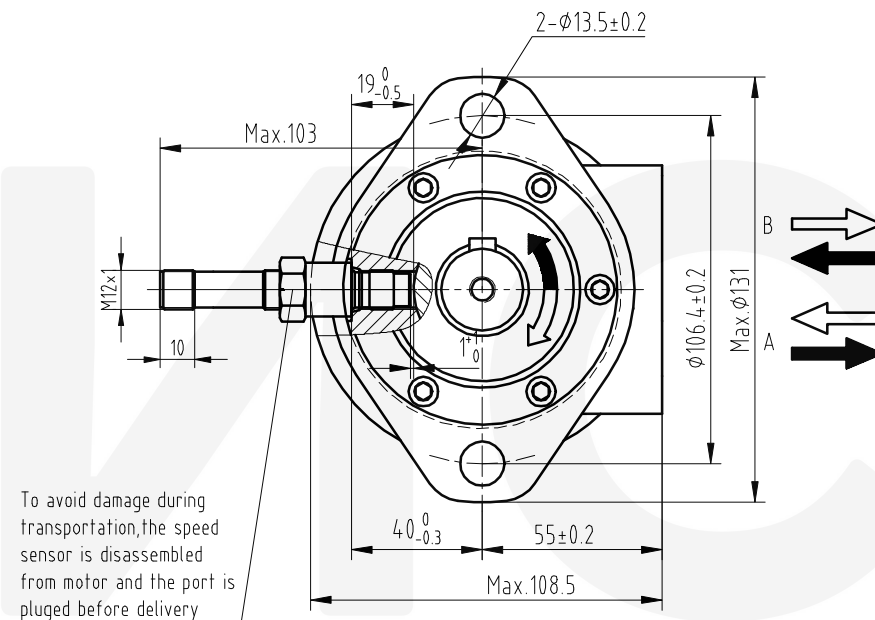


Port A Pressurized-CW
Port B Pressurized-CCW




Technical Data	
Supply voltage	10 ... 30VDC
Rafed sensing distance	0.3 ... 2.5mm
Frequency range	0.5Hz ... 20KHz
Output	Single-channel output
Output signal	PNP
Protection Circuit	Short circuit protection and reversed polarity protection
Operating temperature	-40°C ~ +100°C
Max.pressure sensor tip	350bar
Isolation strength	500VDC
Protection	IP67, IP69K
Max.torque	25Nm
Connection	M12 connector
Housing material	Stainless steel



32	32.5	10	41	1230	40	4.5
Type: xx	Displacement (ml/r)	Max.pressure (Mpa)	Max.torque (N.m)	Max.speed (r/min)	Max.Flow (L /min)	Max.Power (Kw)

Rev.	Description	Date	2022/06/15	
		DESIGNED BY	WSH	
		CHECK BY	HGJ	



Do not try to interpret the technical drawing, please contact us if you are in any doubt about it.

DESCRIPTION

BMR-32P71AIIY10/S10

REPRODUCTION NOT PERMITTED ALL RIGHT RESERVED